
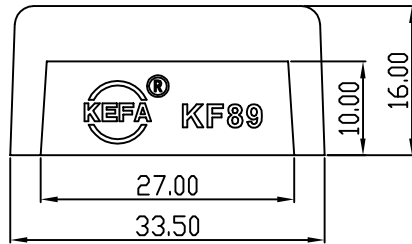
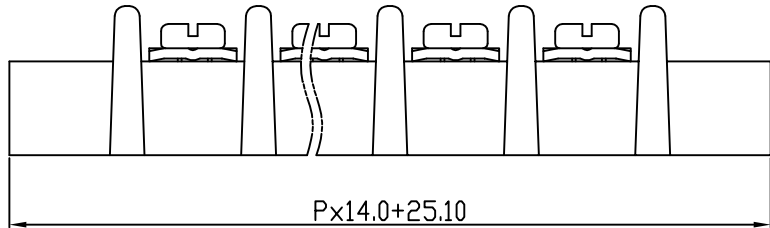



linear dimension(Tolerances Standard GB/T 14486-2008)								—  		
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

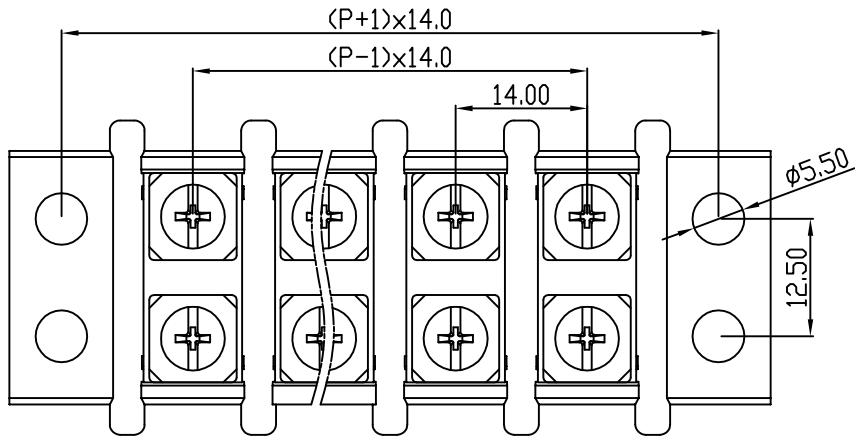

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.04.14

UL/CUL 技术参数 UL/CUL Technical Data					
等 级	Use Group		B	C	D
额定电压	Rated Voltage	[V]	750	-	-
额定电流	Rated Current	[A]	30	-	-
接线范围	Wire Range		22-12		
单/多芯线	Solid/Stranded	[AWG]			
IEC 技术参数 IEC Technical Data					
额定电压	Rated Voltage	[V]	750		
额定电流	Rated Current	[A]	41		
耐电压	Withstanding Voltage		3000V/1Min		
导线截面积	Conductor cross section		4		
硬质/柔性导线	Solid/ flexible	[mm ²]			
材 料 Material					
绝缘材料	Insulation Material		PBT		
阻燃等级	Imflammability		UL94V-0		
导体材料	Contactor Material		铁合金 ferroalloy		
导体表面镀层	Contactive Coating		镀镍 Ni plating		
一般参数 Other Data					
间距 Pitch		[mm]	14		
极数 Poles		[P]	2-24		
剥线长度	Stripping Length	[mm]	-		
螺丝 Screw/扭矩 Torque(Max)		[N.m]	M4/1.0		
工作温度	Operating temperatur	[°C]	-40~+105		
引针尺寸	Pin Dimensions	[mm]	-		
PCB板孔径	PCB Hole Diameter	[mm]	-		

DES.	SJD	DATE	21.04.14	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION		版本 /	A
CHK.	SY	DATE	21.04.14	 慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD							REV	A	
APP.	CLF	DATE	21.04.14							名称 / TITLE	KF89-14.0		