
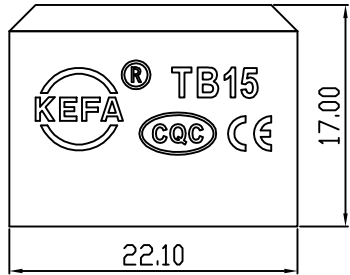


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

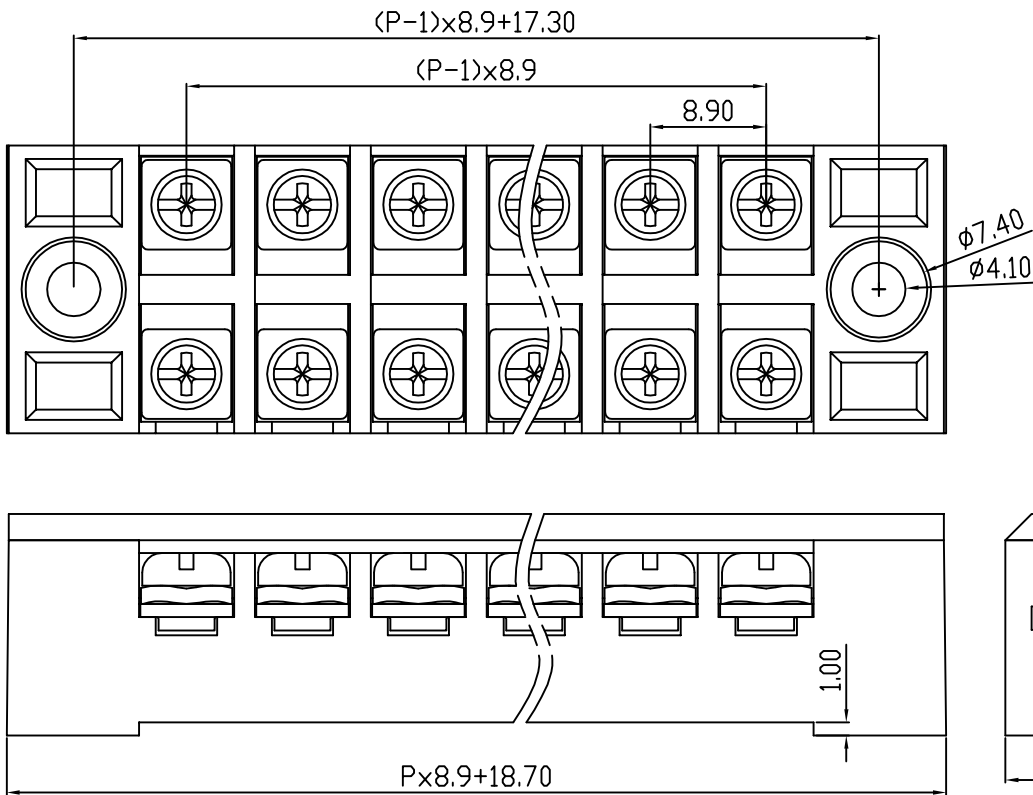

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.12.15

UL/CUL 技术参数					
UL/CUL Technical Data					
等 级	Use Group	B	C	D	
额定电压	Rated Voltage [V]	600	-	-	
额定电流	Rated Current [A]	15	-	-	
接线范围	Wire Range	22-12			
单/多芯线	Solid/Stranded [AWG]				
IEC 技术参数					
IEC Technical Data					
额定电压	Rated Voltage [V]				450
额定电流	Rated Current [A]				32
耐电压	Withstanding Voltage				2500V/1Min
导线截面积	Conductor cross section	4.0			
硬质/柔性导线	Solid/ flexible [mm ²]				
材 料					
Material					
绝缘材料	Insulation Material				PBT
阻燃等级	Imflammability				UL94V-0
导体材料	Contact Material				铁合金 ferroalloy
导体表面镀层	Contactive Coating	镀镍 Ni plating			
一般参数					
Other Data					
间距 Pitch	[mm]				8.9
极数 Poles	[P]				2-24
剥线长度 Stripping Length	[mm]				-
螺丝 Screw/ 扭矩 Torque(Max)	[N.m]				M3/0.8
工作温度 Operating temperatur	[°C]				-30~+120
引针尺寸 Pin Dimensions	[mm]				-
PCB板孔径 PCB Hole Diameter	[mm]	-			

DES.	LQQ	DATE	21.12.15
CHK.	BY	DATE	21.12.15
APP.	CLF	DATE	21.12.15

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1
慈溪市科发电子有限公司 CIXI KEFA ELECTRONICS CO., LTD					

第三视角 / THIRD ANGLE PROJECTION		版本 / REV	A
		名称 / TITLE	TB15-8.9