
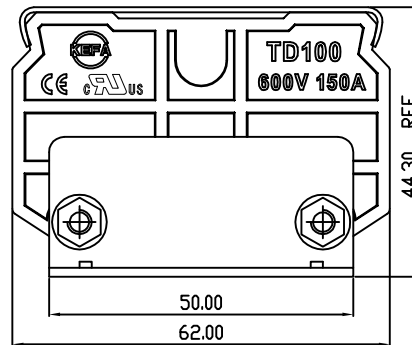
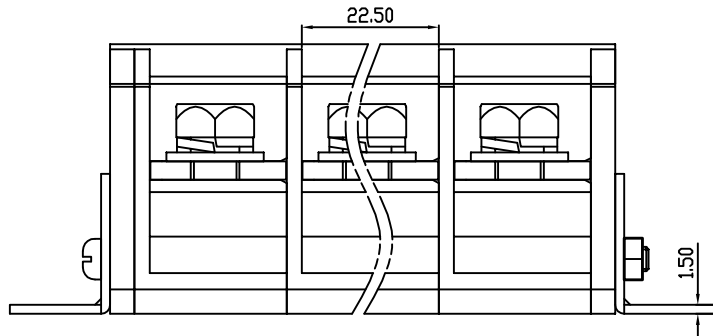
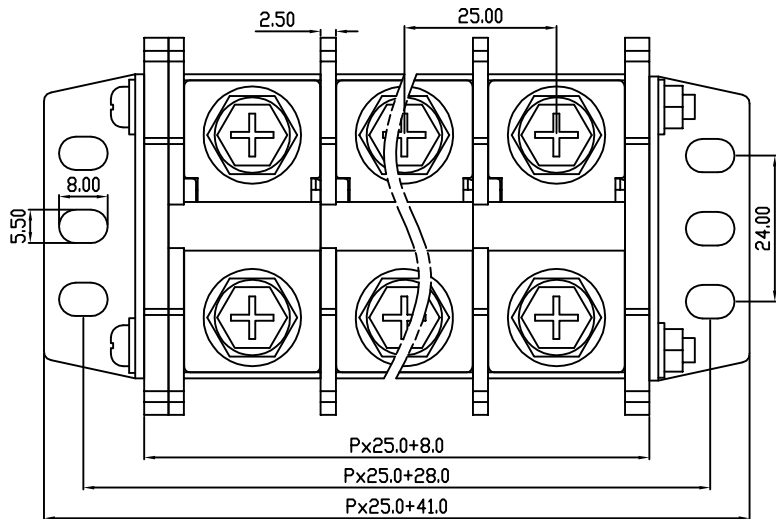


linear dimension(Tolerances Standard GB/T 14486-2008)								—   		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.12.15

UL/CUL 技术参数 UL/CUL Technical Data						
等级	Use Group		B	C	D	
额定电压	Rated Voltage	[V]	600	-	-	
额定电流	Rated Current	[A]	150	-	-	
接线范围	Wire Range		8-1/0			
单/多芯线	Solid/Stranded	[AWG]				
IEC 技术参数 IEC Technical Data						
额定电压	Rated Voltage	[V]	1000			
额定电流	Rated Current	[A]	150			
耐电压	Withstanding Voltage		3500V/1Min			
导线截面积	Conductor cross section		38.0			
硬质/柔性导线	Solid/ flexible	[mm²]				
材料 Material						
绝缘材料	Insulation Material		PC			
阻燃等级	Inflammability		UL94V-0			
导体材料	Contact material		铜合金 Copper alloy			
导体表面镀层	Contactive Coating		镀镍 Ni Plated			
一般参数 Other Data						
间距	Pitch	[mm]	25.0			
极数	Poles	[P]	01-XX			
剥线长度	Stripping Length	[mm]	-			
螺丝	Screw/ 扭矩 Torque(Max)	[N.m]	M8/6.0			
工作温度	Operating temperatur	[°C]	-40~+125			
引针尺寸	Pin Dimensions	[mm]	-			
PCB板孔径	PCB Hole Diameter	[mm]	-			

DES.	LQQ	DATE	21.12.15	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION		版本 / REV	A
CHK.	BY	DATE	21.12.15	慈溪市科发电子有限公司 CIXI KEFA ELECTRONICS CO., LTD									
APP.	CLF	DATE	21.12.15							名称 / TITLE	TD100-25.0		