
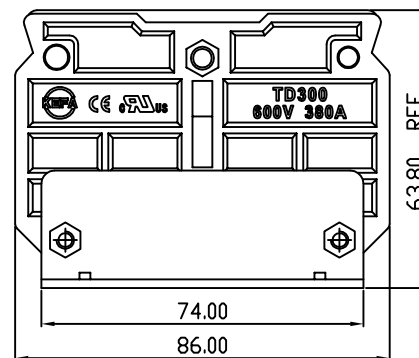
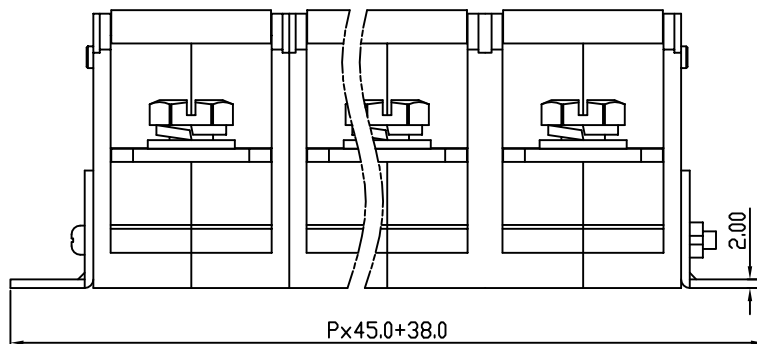


linear dimension(Tolerances Standard GB/T 14486-2008)								—   		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

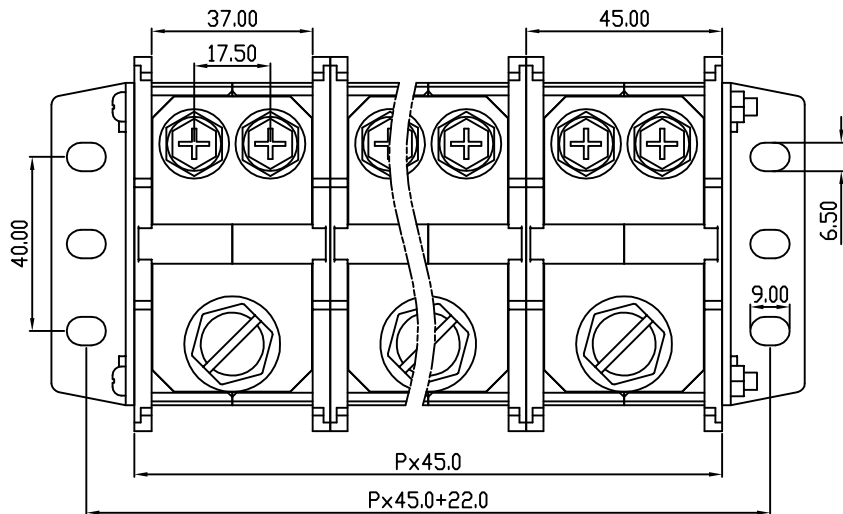

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.12.15

UL/CUL 技术参数							
UL/CUL Technical Data							
等级	Use Group	B	C	D			
额定电压	Rated Voltage [V]	600	-	-			
额定电流	Rated Current [A]	380	-	-			
接线范围	Wire Range	3/0-500					
单/多芯线	Solid/Stranded [AWG]						
IEC 技术参数							
IEC Technical Data							
额定电压	Rated Voltage [V]	1000					
额定电流	Rated Current [A]	380					
耐电压	Withstanding Voltage	3500V/1Min					
导线截面积	Conductor cross section	150.0/60.0					
硬质/柔性导线	Solid/ flexible [mm²]						
材 料							
绝缘材料	Insulation Material						
阻燃等级	Imflammability				PC		
导体材料	Contactor Material				UL94V-0		
导体表面镀层	Contactive Coating				铜合金 Copper alloy		
		镀镍 Ni Plated					
一般参数		Other Data					
间距	Pitch [mm]	45.0					
极数	Poles [P]	01-XX					
剥线长度	Stripping Length [mm]	-					
螺丝	Screw/ 扭矩 Torque(Max) [N.m]	M10/10.0-M8/6.0					
工作温度	Operating temperatur [°C]	-40~+125					
引针尺寸	Pin Dimensions [mm]	-					
PCB板孔径	PCB Hole Diameter [mm]	-					

DES.	LQQ	DATE	21.12.15	单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION		版本 / REV	A
CHK.	BY	DATE	21.12.15	 慈溪市科发电子有限公司 CIXI KEFA ELECTRONICS CO., LTD									
APP.	CLF	DATE	21.12.15								名称 / TITLE		TD300-31-45.0